


Frost Inverter Heat Pump:

Cool & Warm Your Space Efficiently



Features

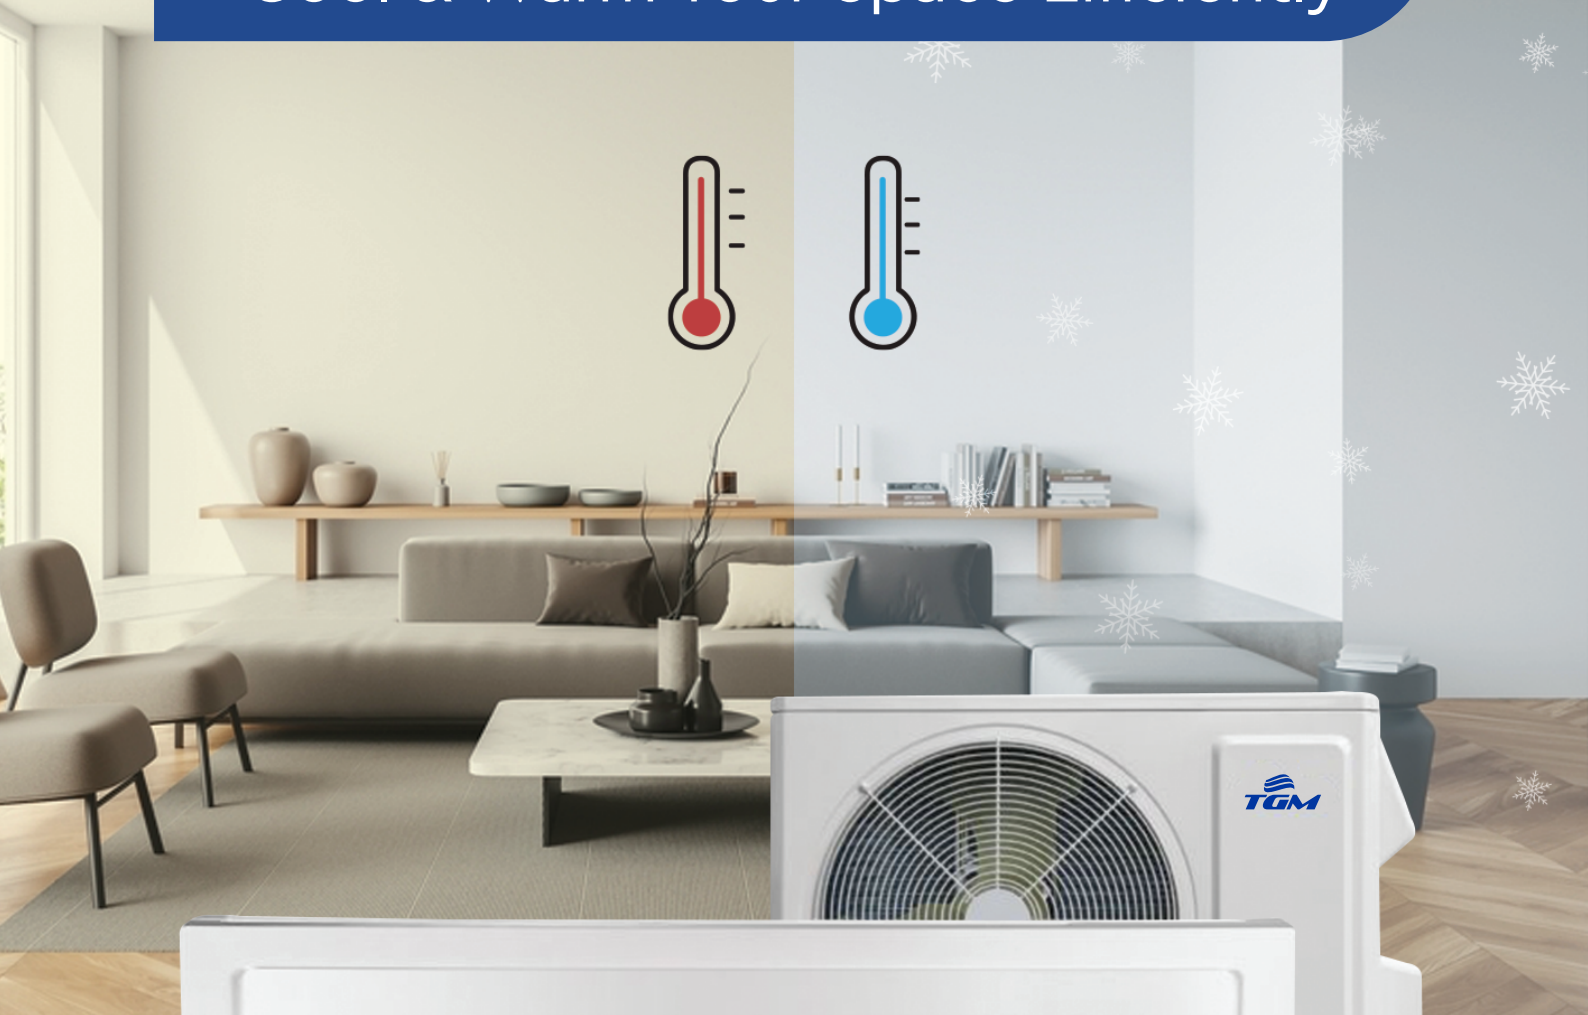

16-18 SEER2 & 8.2-8.5
HSPF2 efficiency



CERTIFIED



Gold Fin Coating



Pipe Kit Included



5-Year All-Parts Warranty

MODEL / MODELO: GWHFRT_S / GRHFRT_AS SPECIFICATIONS / ESPECIFICACIONES

Model			GWHFRT12SA/ GRHFRT12ASA	GWHFRT12S / GRHFRT12AS	GWHFRT18S / GRHFRT18AS	GWHFRT24S / GRHFRT24AS
Power supply		V-Hz-Ph	115 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1
Cooling	Capacity	Btu/h	11700	11700	17400	22000
	Input (Min/Max)	W	180/1500	180/1500	200/2300	445/2500
	Rated current	A	17.9	6.6	9.5	11
	SEER/SEER2	Btu/w	16.5/16.5	16.5/16.5	16.5/16	18/18
Heating	Capacity	Btu/h	12000	12000	19100	24000
	Input (Min/Max)	W	260/1650	260/1650	300/2300	440/2400
	Rated current	A	17.9	7.4	10	12
	HSPF/HSPF2	W/w	9.0/8.5	9.0/8.5	9.0/8.2	10/8.5
Compressor	Type		Rotary	Rotary	Rotary	Rotary
	Model		FTz-AN108ACBD	FTz-AN108ACBD	QXF-A139zH170A	FTz-SM151AXBD
Indoor air flow		m ³ /h	1446 / 400 / 370 / 342 / 310 / 630 / 500	630 / 500 / 446 / 400 / 370 / 342 / 310	800 / 740 / 690 / 635 / 570 / 530 / 470	1150 / 1000 / 950 / 850 / 800 / 750 / 700
Indoor sound power		dB(A)	55/52/49/44/42/39/39	49/47/45/41/40/55/ 52	57/55/52/51/49/47/ 44	61/56/55/52/50/48/ 47
Indoor Unit	Dimension(W*D*H)	inch	33.3x11.4x8.2	33.3x11.4x8.2	38.2x11.8x8.9	42.4 x 12.8x9.7
	Packing (L*W*H)	inch	35.6 x 14.45 x 11.1	35.6 x 14.45 x 11.1	40.4 x 14.9 x 11.97	44.5 x 16.1 x 13.4
	Gross weight	lbs	26.5	26.5	35.3	40.8
Outdoor air flow		m ³ /h	1950	1950	2000	3200
Outdoor sound power (Hi/Mi/Lo)		dB(A)	62	62	67	67
Outdoor Unit	Dimension(W*D*H)	inch	28.8 x 21.9 x 12.99	28.8 x 21.9 x 12.99	31.6 x 21.9 x 13.8	37.7 x 25.98 x 15.8
	Packing (L*W*H)	inch	31.3 x 14.8 x 24.2	31.3 x 14.8 x 24.2	34.3 x 15.7 x 24.4	40.6 x 17.95 x 29
	Gross weight	lbs	63.95	61.74	74.97	106.9
Refrigerant type			R410A	R410A	R410A	R410A
Refrigerant charge		oz	24.696	27.518	42.4	52.9
Refrigerant piping	Length	ft	24.6	24.6	24.6	24.6
	Additional Gas Charge	oz/ft	0.215	0.215	0.17	0.5
	Liquid side/ Gas side	inch	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	1/4" / 5/8"
	Max. length	ft	65.6	65.6	82.0	82.0
	Max. height	ft	32.8	32.8	32.8	32.8
Room Temperature	Indoor (cooling/ heating)	°F	61~86	61~86	61~86	61~86
	Outdoor (cooling/heating)	°F	0~118 / -13~75	0~118 / -13~75	0~118 / -13~75	0~118 / -13~75
Application area (cooling standard)		ft ²	172-258	172-258	247.5-366	247.5-366

TGM Industries, Inc. 2024