



PTAC ACCESSORIES
SPECIFICATION BOOK



TABLE OF CONTENTS

Page No.	Part Number	Description
PTAC WALL SLEEVES & ACESSORIES		
3	AYFDSV01A	Wall Sleeve, Steel SnapEase, Insulated, 42x16x13.75 - Soft Dove
4	AYSVB01A	Wall Sleeve, Steel Assembled, Insulated, 42x16x13.75 - Soft Dove
5	AYFPSV02A	Wall Sleeve, Polymer SnapEase, Insulated, 42x16x14 - Soft Dove
6	AYSV018B	Wall Sleeve 18-in Steel SnapEase, 42x16x18 -Soft Dove
7	AYSV024B	Wall Sleeve 24-in Steel SnapEase, 42x16x24 -Soft Dove
8	AYSVKITB	Wall Sleeve 2-in Steel SnapEase, 42 x 16 x 2 -Soft Dove
PTAC REAR GRILLES		
9	AYRGALA01	Grille, Stamped Aluminum, 42 x 16
10	AYAGALA01A	Grille, Aluminum Architectural, 42 x 16 -Clear
11	AYAGALB01A	Grille, Aluminum Architectural, 42 x 16 -Dark Bronze
12	AYAGALC01A	Grille, Aluminum Architectural, 42 x 16 -Soft Dove
13	AYAGPLB01	Grille, Polymer Architectural, 42 x 16 -Dark Bronze
14	AYAGPLC01	Grille, Polymer Architectural, 42 x 16 -Soft Dove
15	AYAGPLD01	Grille, Polymer Architectural, 42 x 16 -White
CONDENSATE DRAIN KIT		
16	AYDR101B	Drain Kit, Includes Parts for Straight, 90-deg and Internal Drains
PTAC SUBBASES AND COMPONENTS		
17	AYSB1201B	Subbase, 208/230V 20A
18	AYSB1301B	Subbase, 208/230V 30A
19	AYSB2201B	Subbase, 265V 20A
20	AYSB220DS	Subbase, 265V 20A with Disconnect Switch
21	AYSB6101	Subbase, Non-Electrical Subbase
22	AYDSW120B	Subbase Switch Kit, DPST Disconnect Switch - 208/230V 20A
23	AYDSW130B	Subbase Switch Kit, DPST Disconnect Switch - 208/230V 30A
24	AYDSW220B	Subbase Switch Kit, DPST Disconnect Switch - 265V 20A
25	AYLL101B	Leveling Legs, adjustable to support and level unit, 2 per pack
LATERAL DUCT		
26	AYLD1A	Lateral Duct, Includes Plenum and 4-ft Extension Duct - Soft Dove

Submission Data: AYFDSV01A PTAC Standard Metal Wall Sleeve


Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

- GENERAL FEATURES**
- Standard 42 x 16 x 13.75-in wall sleeve.
 - Lined with acoustical & thermal insulation.
 - Made of heavy duty Galvalume steel.
 - Powder coated paint for superior adhesion & protection.
 - Exterior weather barrier included for construction phase.
 - Key hole slots for easy rear grille mounting.
 - Rear drainage holes on right and left sides.



Specifications
Material: Galvalume (Aluminum-Zinc alloy coated steel) Material Thickness*: 0.0433 to 0.0480-in Insulation: Dual-density Fiber Glass Insulation Thickness: 0.25-in Color: Soft Dove Finish: Lightly Textured Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute * including paint.

Unit Dimensions	
Length	42.0-in
Height	16.0-in
Depth	13.75-in
Weight	28.0-lbs
Shipping Dimensions	
Length	45.5-in
Height	3.0-in
Depth	15.0-in
Weight	28.5-lbs
Pallet Qty	42 pcs

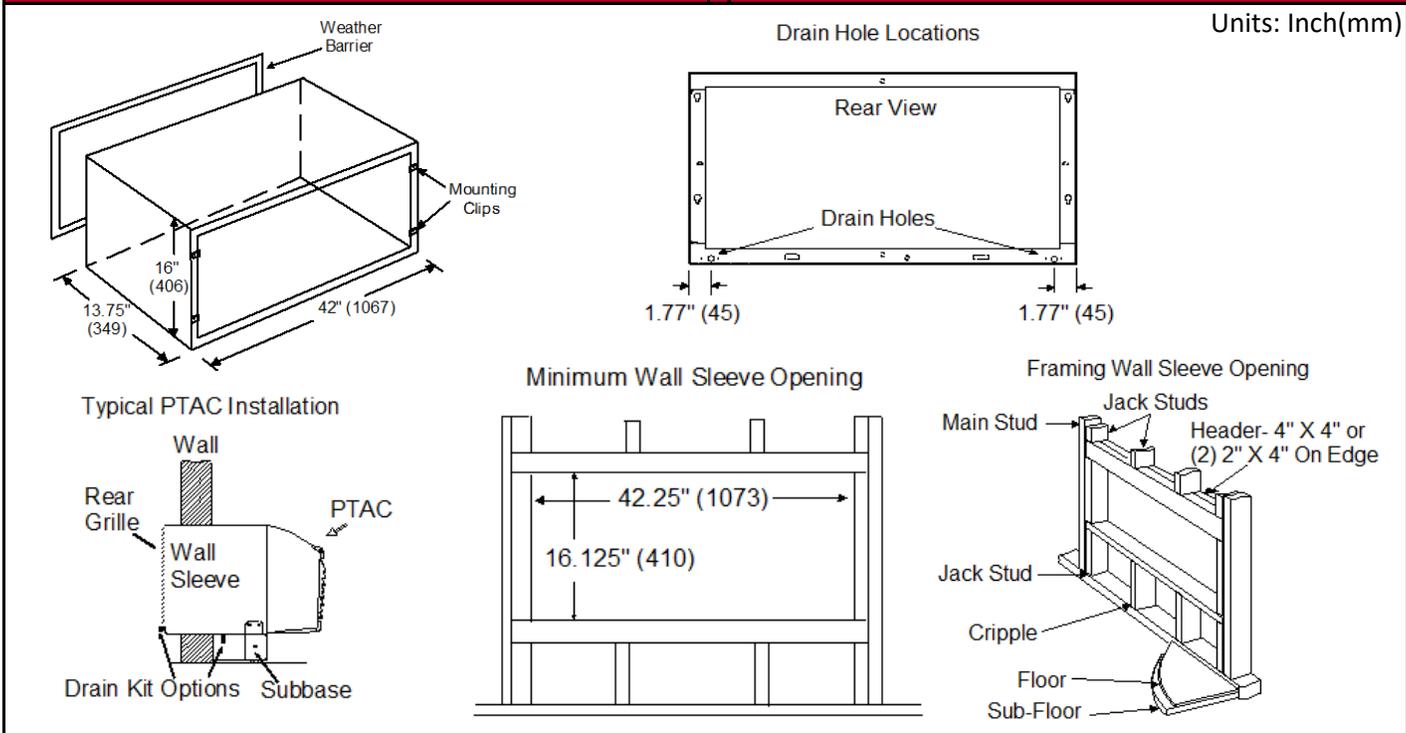

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submission Data: AYSVB01A PTAC Standard Metal Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Standard 42 x 16 x 13.75-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvalume steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.



Specifications

Material: Galvalume (Aluminum-Zinc alloy coated steel)
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute


* including paint.

Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	13.75-in
Weight	28.0-lbs

Shipping Dimensions

Length	43.5-in
Height	16.75-in
Depth	14.5-in
Weight	28.5-lbs
Pallet Qty	9 pcs

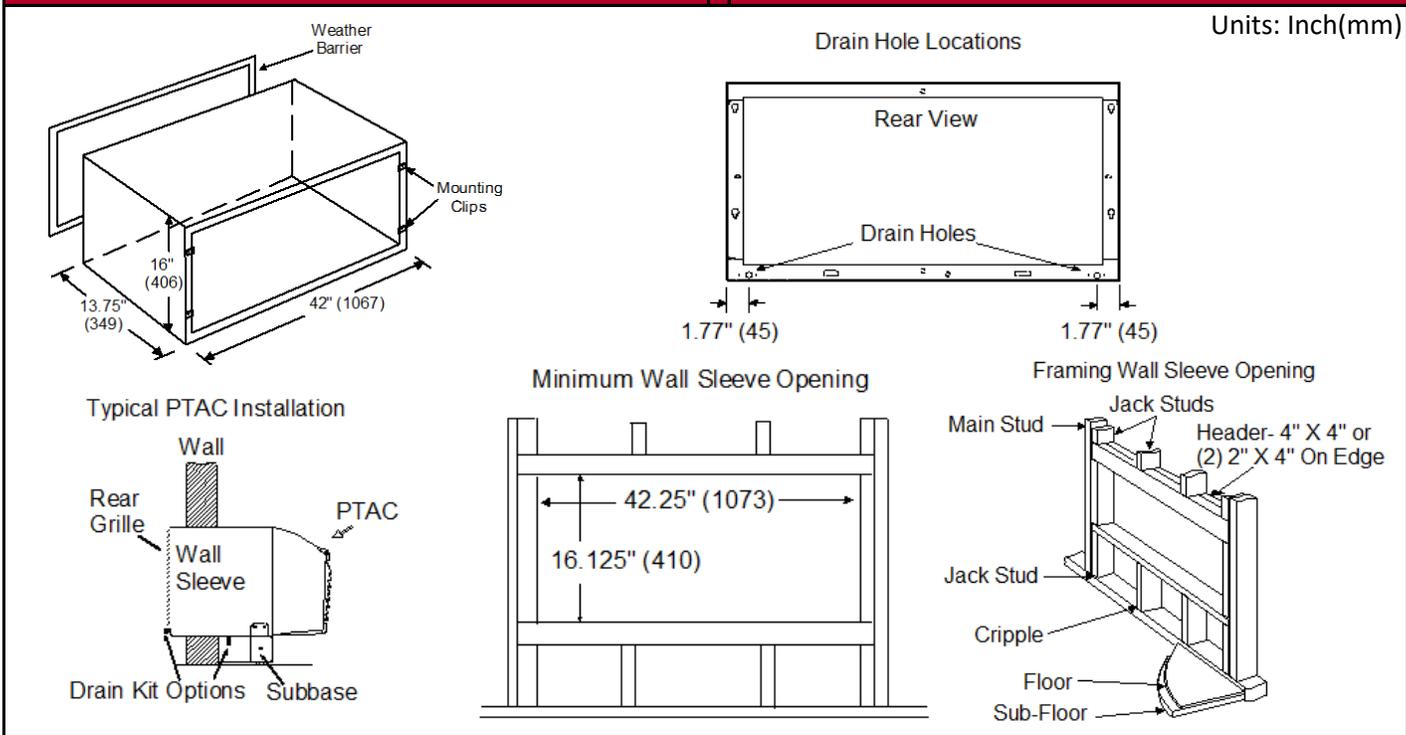

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYFPSV02A PTAC Standard Polymer Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

- GENERAL FEATURES**
- Standard 42 x 16 x 13.9-in wall sleeve.
 - Noncorrosive fiberglass-reinforced polyester compound.
 - Stainless steel latches.
 - Lined with acoustical & thermal insulation.
 - Exterior weather barrier included for construction phase.
 - Key hole slots for easy rear grille mounting.
 - Rear drainage holes on right and left sides.




Specifications	Unit Dimensions
-----------------------	------------------------

Material: Sheet Molding Compound (SMC) w/Fiberglass Reinforcement
 Fire Rating: UL-5V
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

Length	42.0-in
Height	16.0-in
Depth	13.9-in
Weight	24.0-lbs

Shipping Dimensions

Length	45.5-in
Height	3.25-in
Depth	15.5-in
Weight	24.5-lbs
Pallet Qty	42 pcs

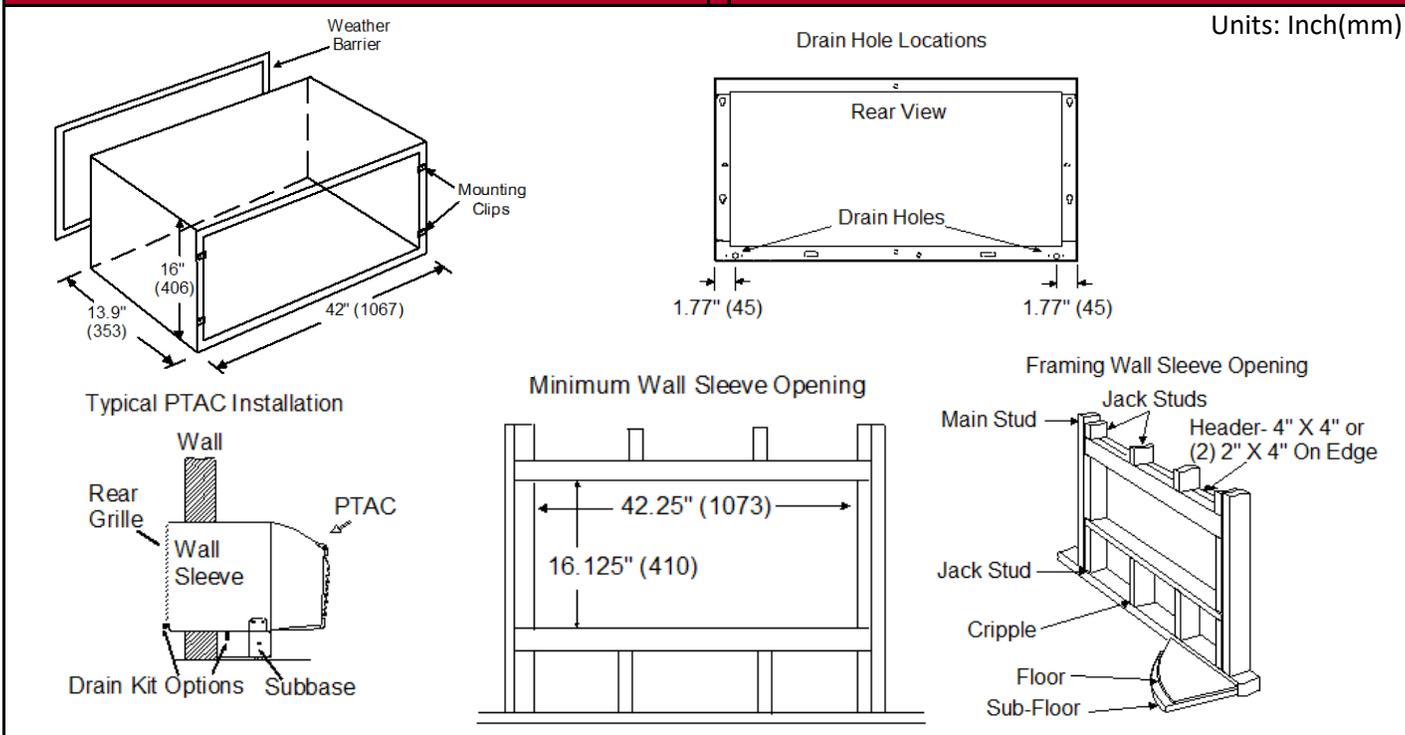

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submission Data: AYSV018B PTAC 18-inch Extended Metal Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

- GENERAL FEATURES**
- Extended 42 x 16 x 18-in wall sleeve.
 - Lined with acoustical & thermal insulation.
 - Made of heavy duty Galvalume steel.
 - Powder coated paint for superior adhesion & protection.
 - Exterior weather barrier included for construction phase.
 - Key hole slots for easy rear grille mounting.
 - Rear drainage holes on right and left sides.



Specifications	Unit Dimensions										
Material: Galvalume (Aluminum-Zinc alloy coated steel) Material Thickness*: 0.0433 to 0.0480-in Insulation: Dual-density Fiber Glass Insulation Thickness: 0.25-in Color: Soft Dove Finish: Lightly Textured Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute * including paint.	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Length</td> <td style="text-align: right; padding: 5px;">42.0-in</td> </tr> <tr> <td style="padding: 5px;">Height</td> <td style="text-align: right; padding: 5px;">16.0-in</td> </tr> <tr> <td style="padding: 5px;">Depth</td> <td style="text-align: right; padding: 5px;">18.0-in</td> </tr> <tr> <td style="padding: 5px;">Weight</td> <td style="text-align: right; padding: 5px;">44.0-lbs</td> </tr> </table>	Length	42.0-in	Height	16.0-in	Depth	18.0-in	Weight	44.0-lbs		
Length	42.0-in										
Height	16.0-in										
Depth	18.0-in										
Weight	44.0-lbs										
Shipping Dimensions											
	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Length</td> <td style="text-align: right; padding: 5px;">46.5-in</td> </tr> <tr> <td style="padding: 5px;">Height</td> <td style="text-align: right; padding: 5px;">3.25-in</td> </tr> <tr> <td style="padding: 5px;">Depth</td> <td style="text-align: right; padding: 5px;">19.0-in</td> </tr> <tr> <td style="padding: 5px;">Weight</td> <td style="text-align: right; padding: 5px;">44.5-lbs</td> </tr> <tr> <td style="padding: 5px;">Pallet Qty</td> <td style="text-align: right; padding: 5px;">28 pcs</td> </tr> </table>	Length	46.5-in	Height	3.25-in	Depth	19.0-in	Weight	44.5-lbs	Pallet Qty	28 pcs
Length	46.5-in										
Height	3.25-in										
Depth	19.0-in										
Weight	44.5-lbs										
Pallet Qty	28 pcs										

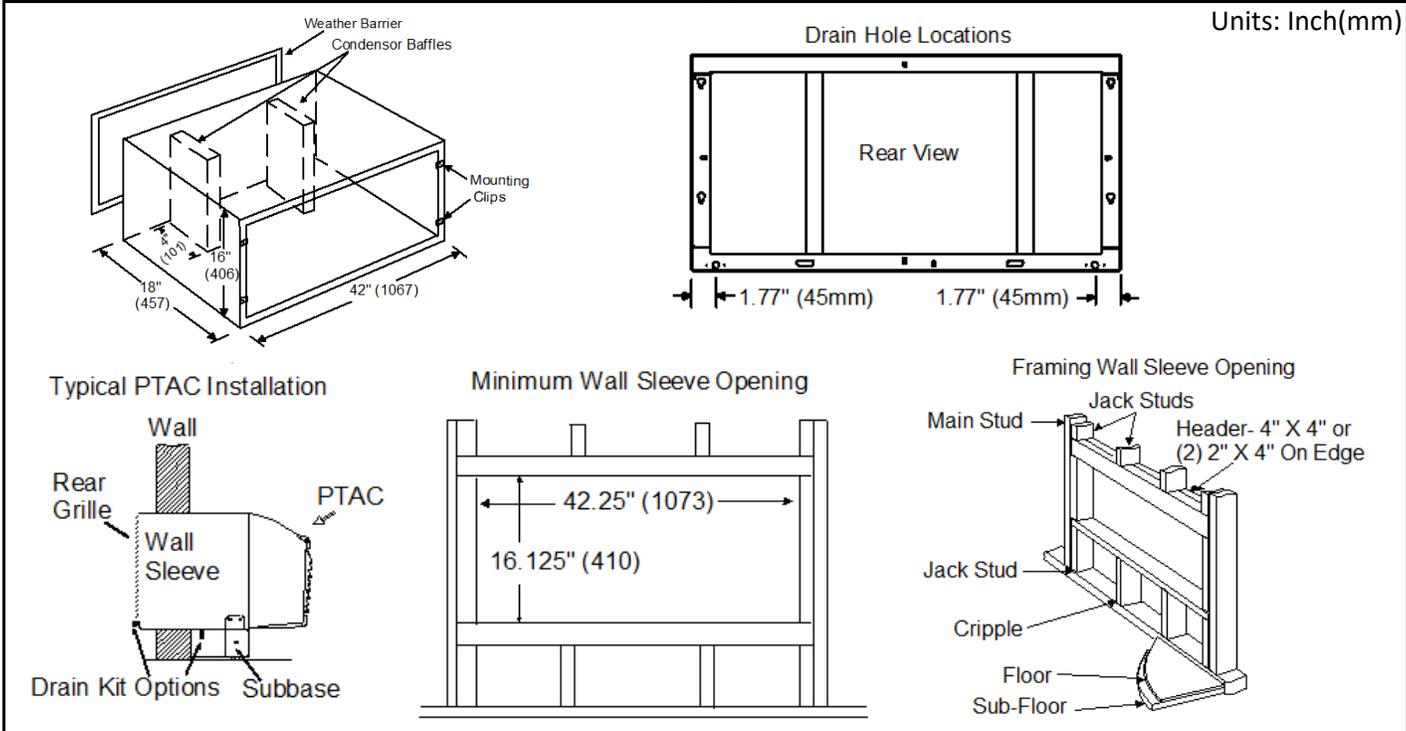

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submission Data: AYSV024B PTAC 24-inch Extended Metal Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

- GENERAL FEATURES**
- Extended 42 x 16 x 24-in wall sleeve.
 - Lined with acoustical & thermal insulation.
 - Made of heavy duty Galvalume steel.
 - Powder coated paint for superior adhesion & protection.
 - Exterior weather barrier included for construction phase.
 - Key hole slots for easy rear grille mounting.
 - Rear drainage holes on right and left sides.



Specifications	Unit Dimensions										
Material: Galvalume (Aluminum-Zinc alloy coated steel) Material Thickness*: 0.0433 to 0.0480-in Insulation: Dual-density Fiber Glass Insulation Thickness: 0.25-in Color: Soft Dove Finish: Lightly Textured Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute * including paint.	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Length</td> <td style="text-align: right; padding: 5px;">42.0-in</td> </tr> <tr> <td style="padding: 5px;">Height</td> <td style="text-align: right; padding: 5px;">16.0-in</td> </tr> <tr> <td style="padding: 5px;">Depth</td> <td style="text-align: right; padding: 5px;">24.0-in</td> </tr> <tr> <td style="padding: 5px;">Weight</td> <td style="text-align: right; padding: 5px;">59.0-lbs</td> </tr> </table>	Length	42.0-in	Height	16.0-in	Depth	24.0-in	Weight	59.0-lbs		
Length	42.0-in										
Height	16.0-in										
Depth	24.0-in										
Weight	59.0-lbs										
Shipping Dimensions											
	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Length</td> <td style="text-align: right; padding: 5px;">45.25-in</td> </tr> <tr> <td style="padding: 5px;">Height</td> <td style="text-align: right; padding: 5px;">4.0-in</td> </tr> <tr> <td style="padding: 5px;">Depth</td> <td style="text-align: right; padding: 5px;">25.75-in</td> </tr> <tr> <td style="padding: 5px;">Weight</td> <td style="text-align: right; padding: 5px;">59.5-lbs</td> </tr> <tr> <td style="padding: 5px;">Pallet Qty</td> <td style="text-align: right; padding: 5px;">24 pcs</td> </tr> </table>	Length	45.25-in	Height	4.0-in	Depth	25.75-in	Weight	59.5-lbs	Pallet Qty	24 pcs
Length	45.25-in										
Height	4.0-in										
Depth	25.75-in										
Weight	59.5-lbs										
Pallet Qty	24 pcs										

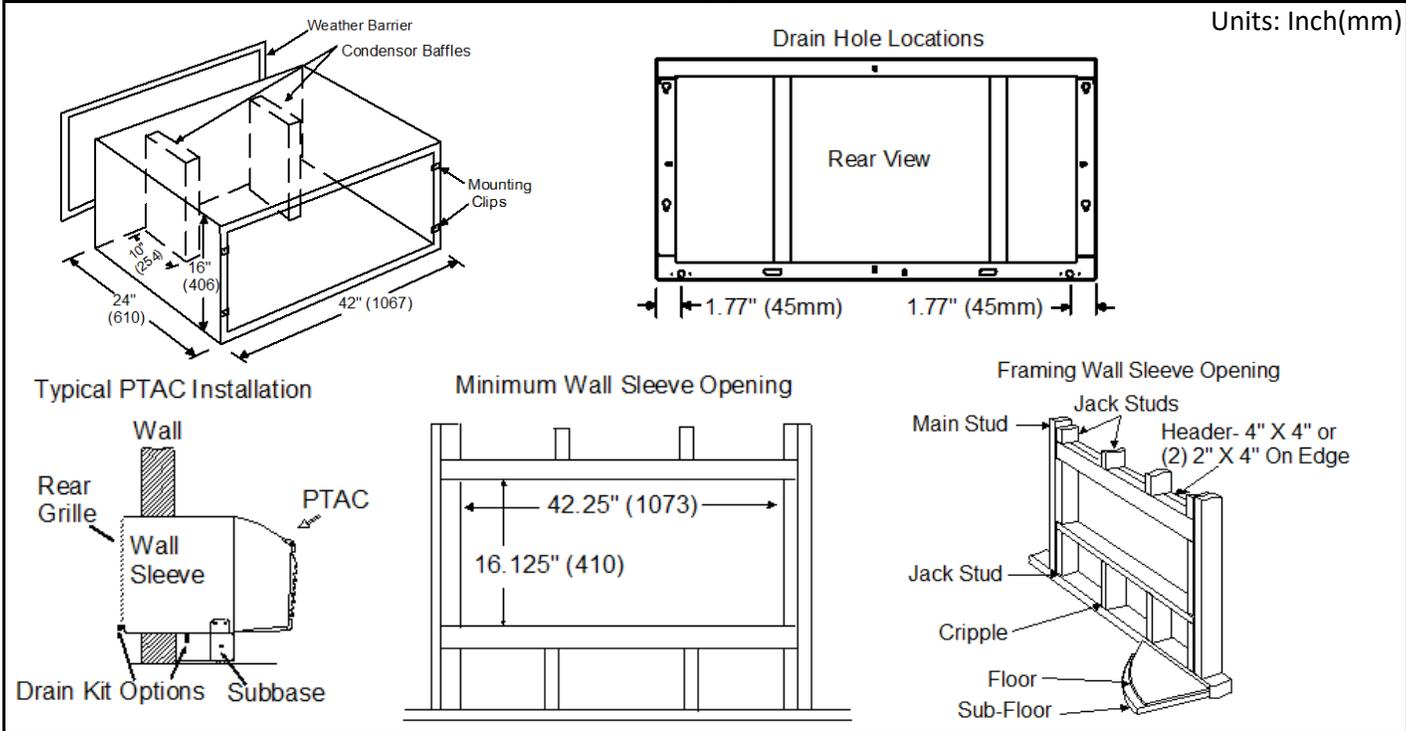


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSVKITB 2-inch Wall Sleeve Extender

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- 42 x 16 x 2-in wall sleeve extender.
- Fits on front side of standard wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvalume steel.
- Powder coated paint for superior adhesion & protection.
- Includes (2) condenser air baffle/gasket extenders.
- Includes (4) mounting screws for wall sleeve attachment.

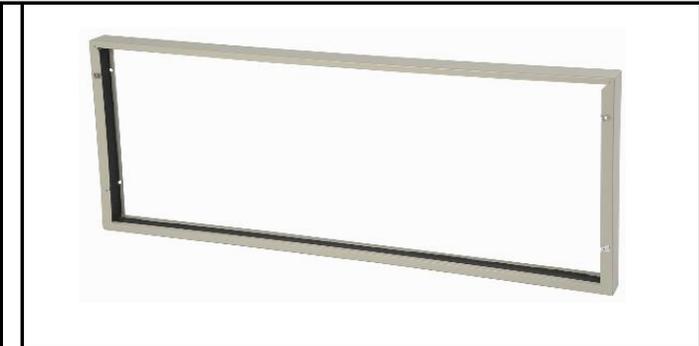

Specifications

Material: Galvalume (Aluminum-Zinc alloy coated steel)
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured
 Condenser Baffles/Gaskets: 12.5 x 2 x 2-in (closed cell foam)

* including paint.

Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	2.0-in
Weight	6-lbs

Shipping Dimensions

Length	43.75-in
Height	2.5-in
Depth	16.5-in
Weight	6.5-lbs
Pallet Qty	32 pcs

Units: Inch(mm)

Add condenser baffle/gasket extenders to outdoor grille. (Grille type shown- ref only)

Fastens to indoor side with 4 screws.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYRGALA01 **Stamped Aluminum Grille**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES


- Strong and durable aluminum construction.
- Clear anodized aluminum color.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain holes provided.
- Factory installed foam condenser air baffle/gaskets.



Specifications
Material: Aluminum Finish: Clear Fin Thickness: 1.02 mm Condenser Fin Pitch: 73° Condenser Free Area: 96 %

Unit Dimensions	
Length	41.6-in
Height	15.6-in
Depth	0.5-in
Weight	3-lbs
Shipping Dimensions	
Length	42-in
Height	16-in
Depth	1-in
Weight	3.5-lbs
Pallet Qty	86 pcs

Units: Inch(mm)

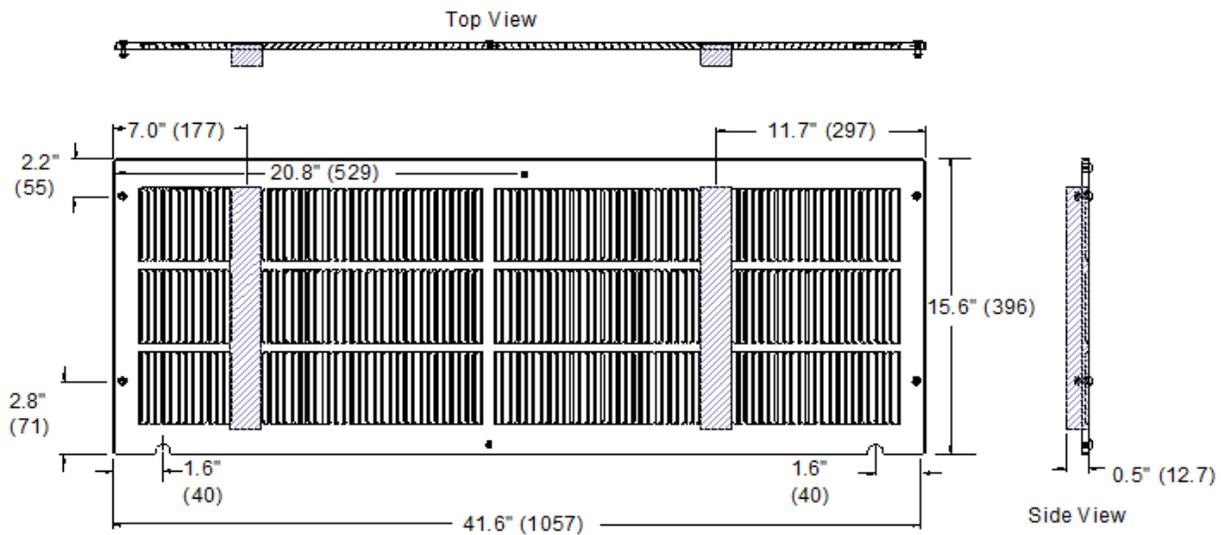


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

AYAGALA01A Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction

Schedule No.

- GENERAL FEATURES**
- Decorative architectural style aluminum grille.
 - Clear anodized aluminum color.
 - 42 in. x 16 in. design.
 - Designed to be mounted easily from inside the room.
 - Right & left drain hole knockouts provided.
 - Condenser air baffle/gaskets with vertical air deflectors.

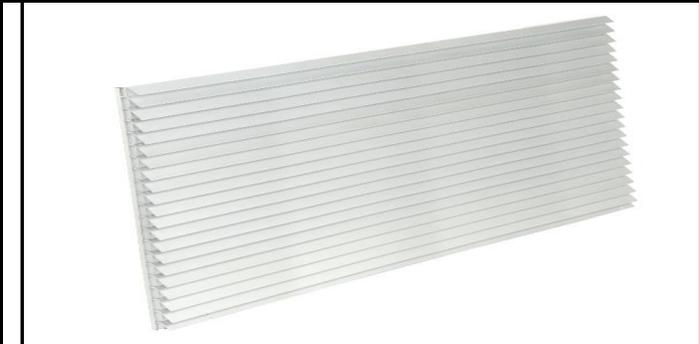

Specifications

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Clear Anodized
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %


Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

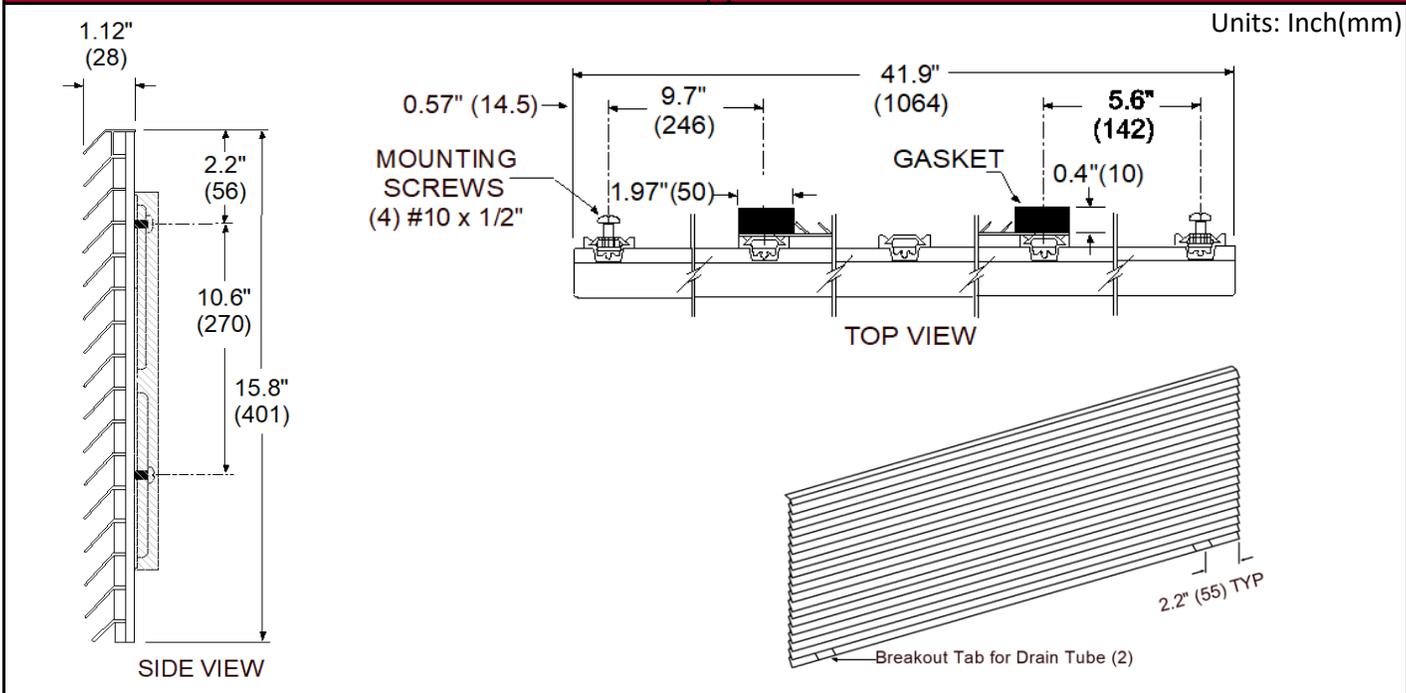


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYAGALB01A Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction

Schedule No. _____

- GENERAL FEATURES**
- Decorative architectural style aluminum grille.
 - Powder coat painted for superior adhesion & protection.
 - 42 in. x 16 in. design.
 - Designed to be mounted easily from inside the room.
 - Right & left drain hole knockouts provided.
 - Condenser air baffle/gaskets with vertical air deflectors.

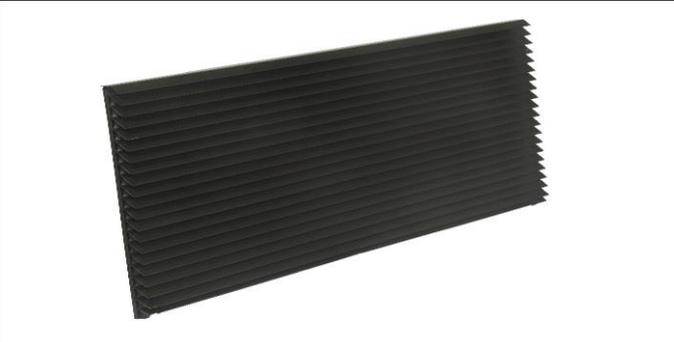

Specifications

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Dark Bronze/Brown
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

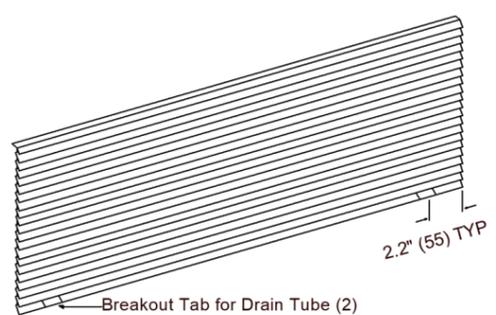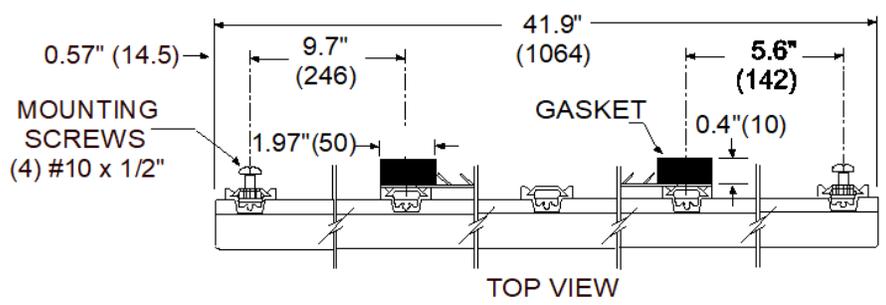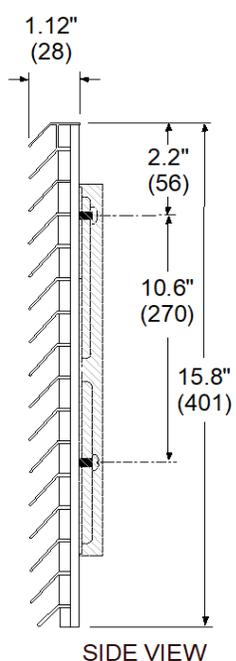

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: AYAGALC01A

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

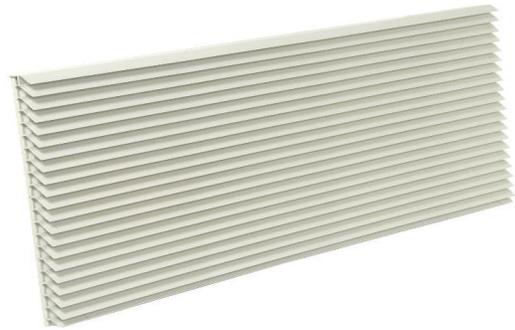

Specifications

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Soft Dove Beige
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

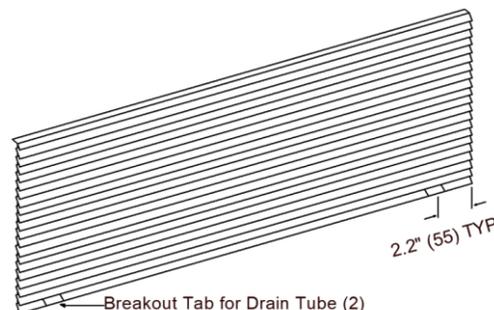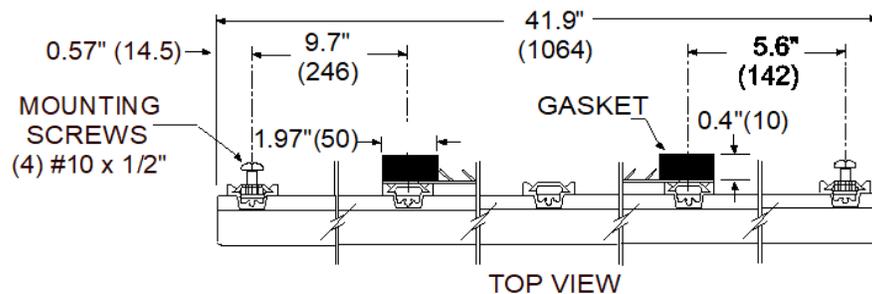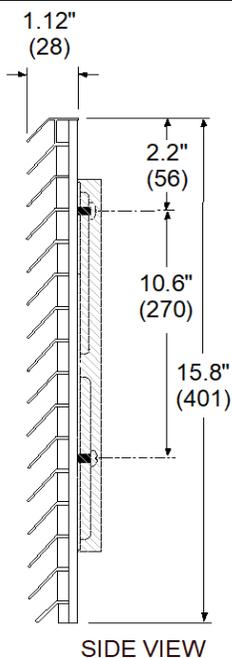

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYAGPLB01

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

- GENERAL FEATURES**
- Decorative 1-piece molded grille.
 - Colorfast, lightly textured finish.
 - 42 in. x 16 in. design.
 - Meets UL flammability rating of UL94-2V.
 - Right & left drain slots provided.
 - Condenser air baffle/gaskets with vertical air deflectors.
 - Contains UV protector.



Specifications


Material: Injection Molding Polycarbonate
 Finish: Dark Bronze
 Louver Thickness: 0.125-in
 Wall & Rib Thickness: 0.070-in
 Louver Pitch: 49°
 Condenser Free Area: 65.3 %

Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

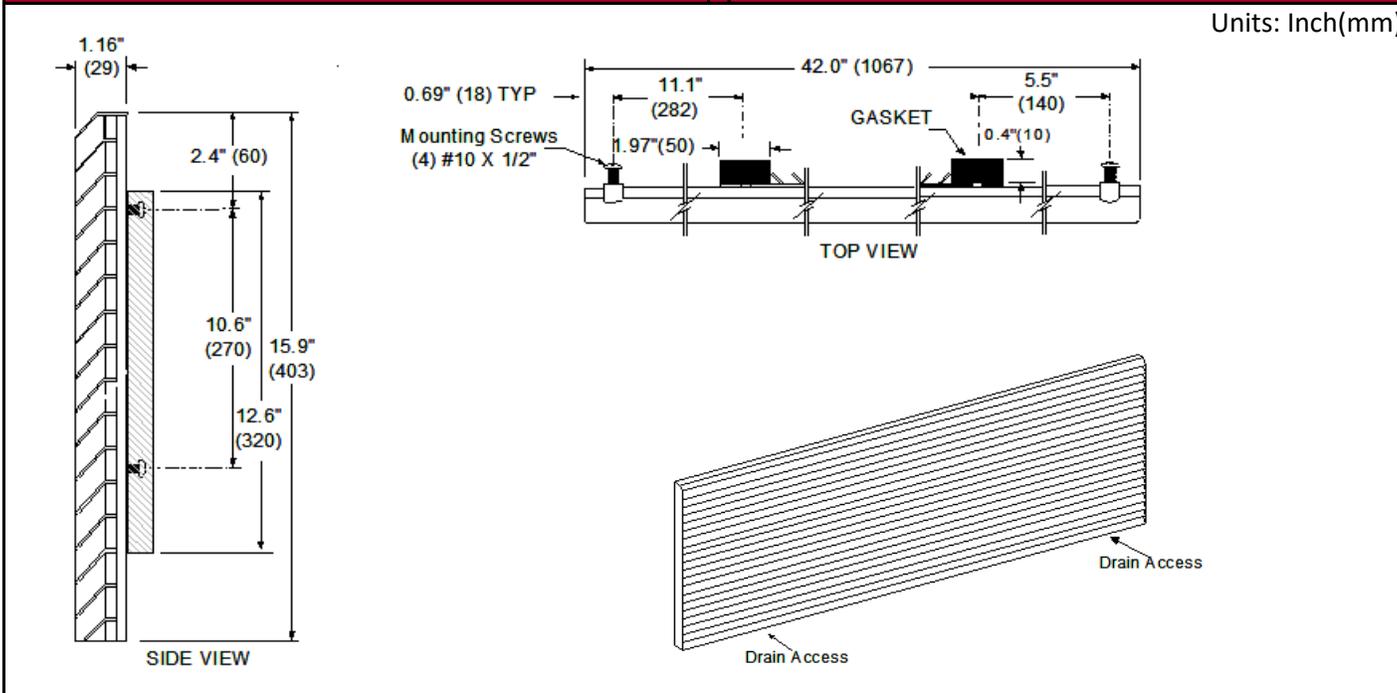


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYAGPLC01

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

- GENERAL FEATURES**
- Decorative 1-piece molded grille.
 - Colorfast, lightly textured finish.
 - 42 in. x 16 in. design.
 - Meets UL flammability rating of UL94-2V.
 - Right & left drain slots provided.
 - Condenser air baffle/gaskets with vertical air deflectors.
 - Contains UV protector.

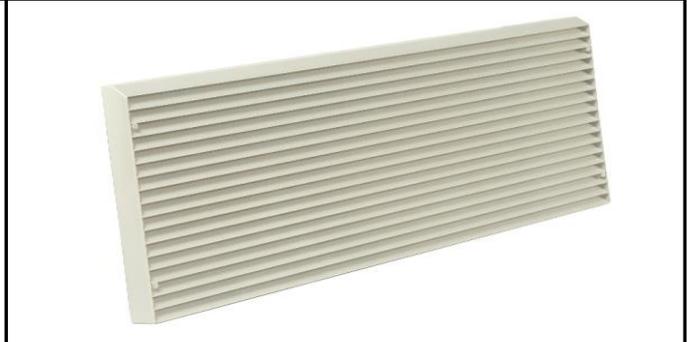

Specifications


Material: Injection Molding Polycarbonate
 Finish: Soft Dove Beige
 Louver Thickness: 0.125-in
 Wall & Rib Thickness: 0.070-in
 Louver Pitch: 49°
 Condenser Free Area: 65.3 %

Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

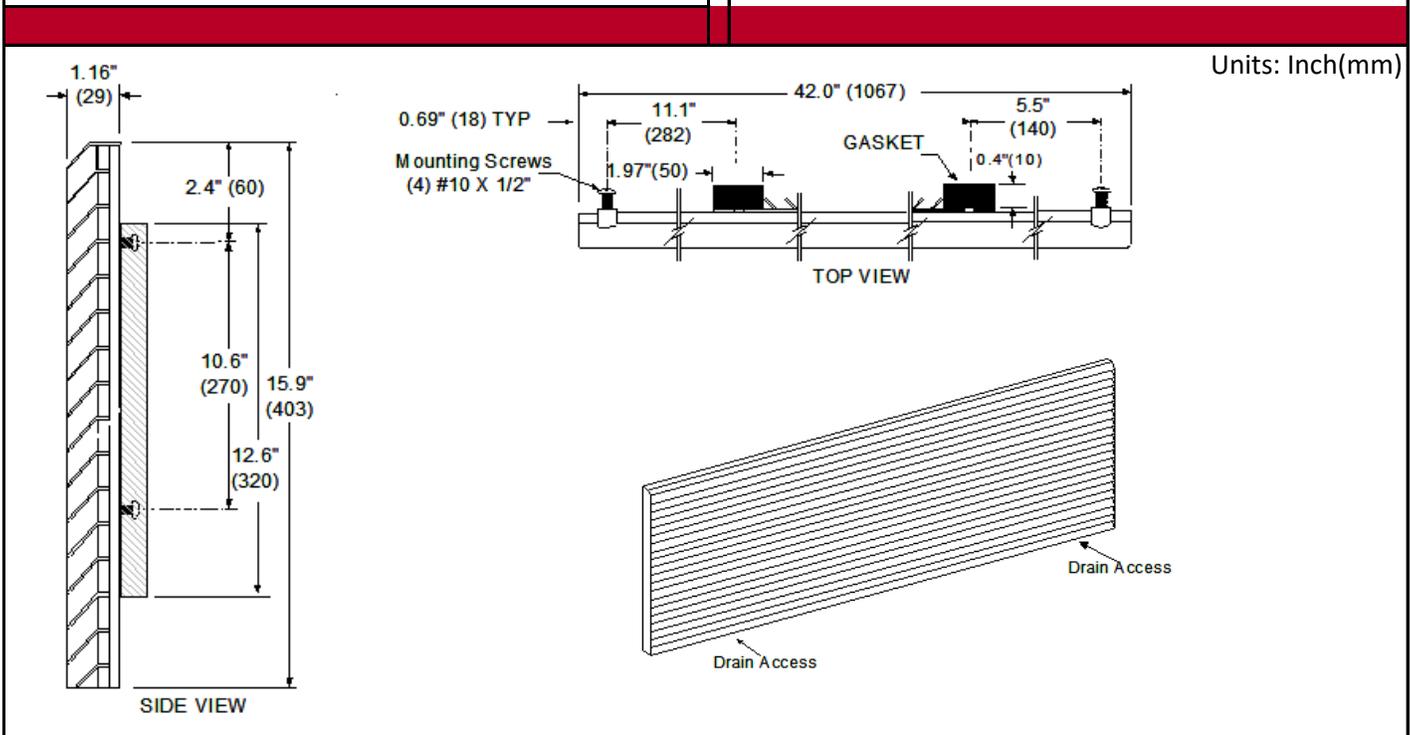

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: AYAGPLD01

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

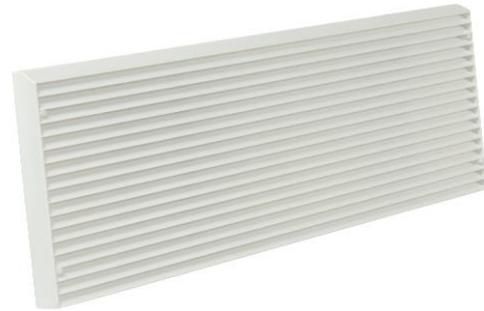

Specifications

Material: Injection Molding Polycarbonate
 Finish: White
 Louver Thickness: 0.125-in
 Wall & Rib Thickness: 0.070-in
 Louver Pitch: 49°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.6-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

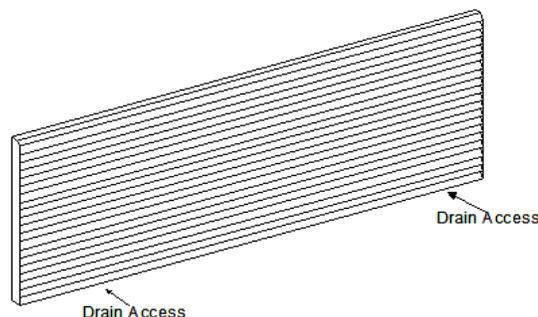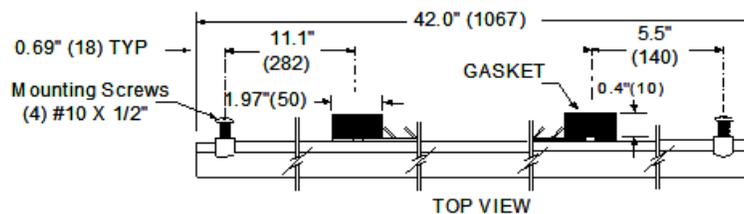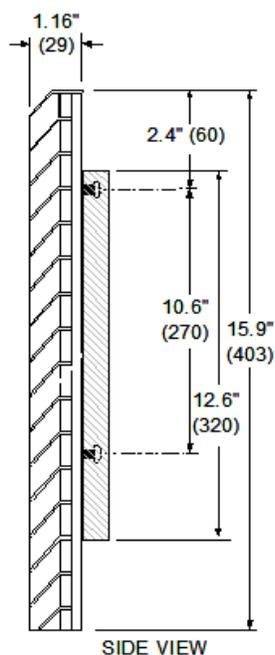

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYDR101B PTAC Condensate Drain

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		


GENERAL FEATURES

- Easily mounts to rear flange for an exterior drain system.
- Includes a 3-inch straight and short 90-degree drain copper tube.
- Mounts easily and securely to standard wall sleeve.
- Configurable for internal wall drain system.
- Corrosive resistant stainless steel screws.






Shipping Dimensions

Length	6.0-in
Height	0.5-in
Depth	6.0-in
Weight	0.25-lbs
Pallet Qty	2920 pcs

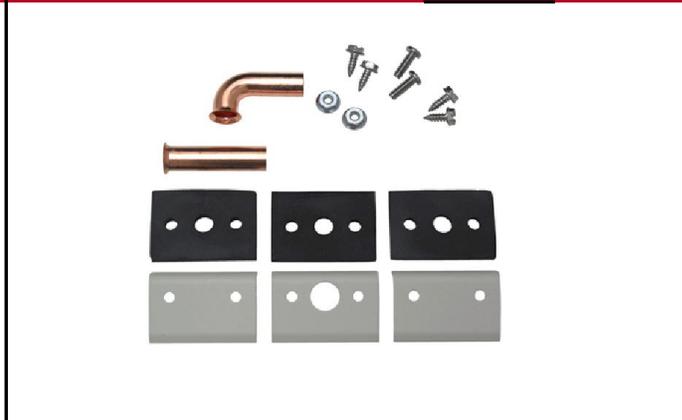

Units: Inch(mm)

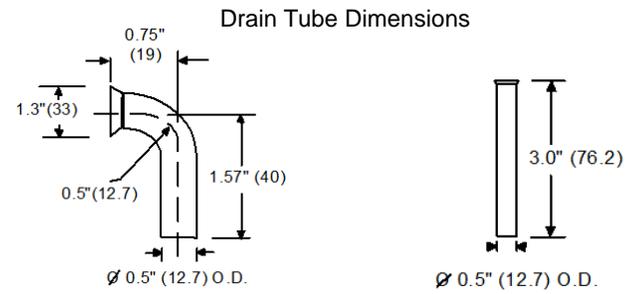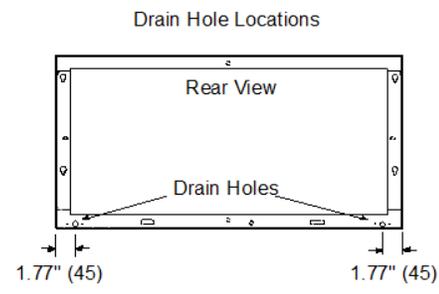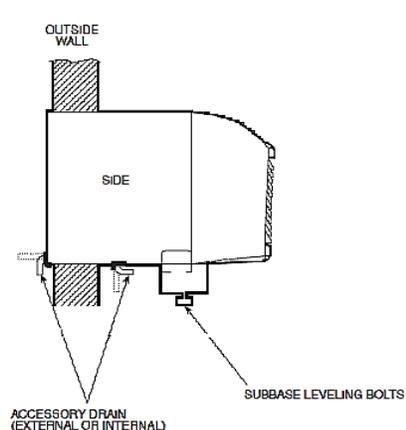

- Kit Includes :
- (1) 90 deg Copper Drain Tube
 - (1) 3" Straight Copper Drain Tube
 - (2) Solid Drain Brackets incl. Foam to Seal Drain Holes
 - (1) Drain Bracket with Hole for Drain Tube incl Foam Seal
 - Stainless Steel Screws

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB1201B

PTAC 208/230v 20A Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals excess unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.



Specifications

Physical:

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Black
 Finish: Powder coated paint

Electrical:

Voltage Rating: 208/230v
 Current Rating: 20 amp
 Receptacle Type: NEMA 6-20




* including paint.

Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

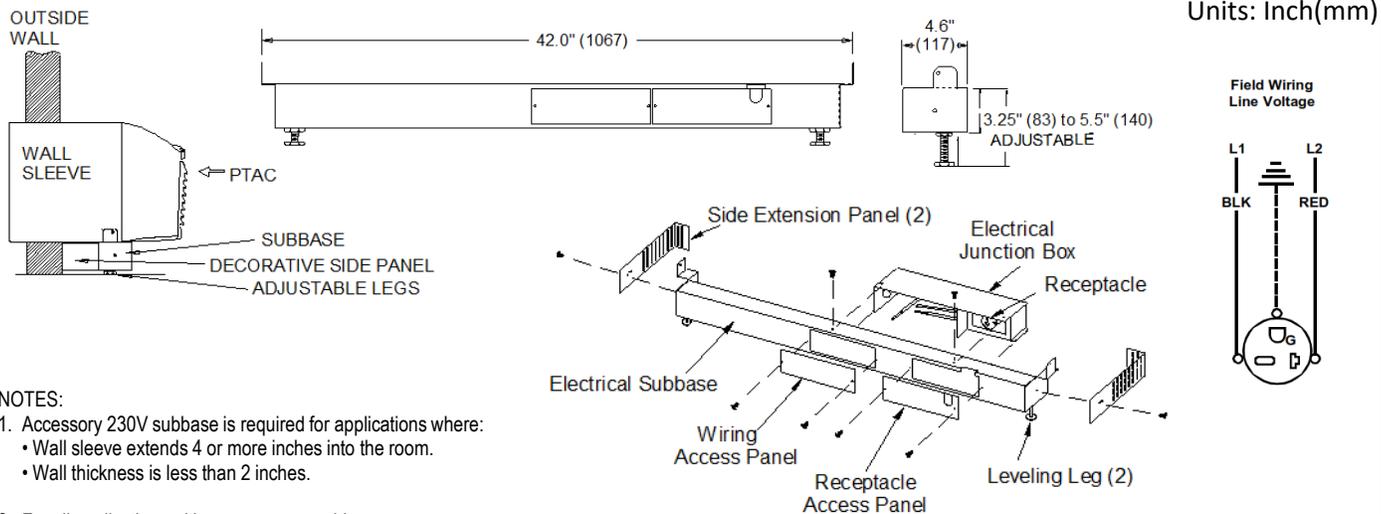

Units: Inch(mm)

NOTES:

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB1301B

PTAC 208/230v 30A Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals excess unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.




Specifications

Physical:

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Black
 Finish: Powder coated paint

Electrical:

Voltage Rating: 208/230v
 Current Rating: 30 amp
 Receptacle Type: NEMA 6-30






* including paint.

Unit Dimensions



Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

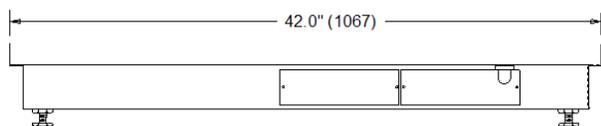

Units: Inch(mm)

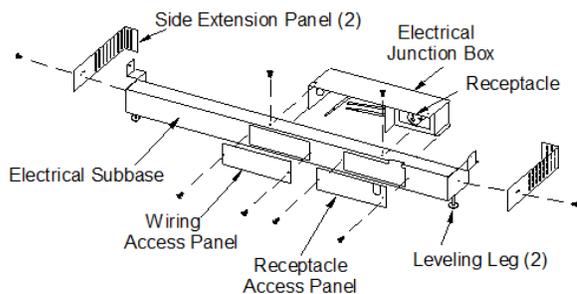

NOTES:

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB2201B PTAC 265v 20A Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

- GENERAL FEATURES**
- Contains a prewired NEMA receptacle outlet.
 - Multiple electrical knockouts for fast and easy installation.
 - Conceals unit power cord for a neat, finished appearance.
 - Adjustable height of 3¼ to 5½ inches from finished floor.
 - Steel chase-way between unit and subbase to hide power cord.
 - Mounts easily and securely to standard wall sleeve.
 - Decorative side skirting for finished appearance.
 - Optional field installed pre-wired disconnect switch and fuse kits.



Specifications
<p>Physical:</p> <p>Material: Steel</p> <p>Material Thickness*: 0.0433 to 0.0480-in</p> <p>Color: Black</p> <p>Finish: Powder coated paint</p> <p>Electrical:</p> <p>Voltage Rating: 265v</p> <p>Current Rating: 20 amp</p> <p>Receptacle Type: NEMA 7-20</p>

Unit Dimensions	
Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs
Shipping Dimensions	
Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

Units: Inch(mm)

Field Wiring Line Voltage

NOTES:

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB220DS PTAC 265v 20A Electrical Subbase w/ Disconnect Switch

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet and disconnect switch.
- Multiple electrical knockouts for fast and easy installation.
- Conceals unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Steel chase-way between unit and subbase to hide power cord.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed fuse kit.



Specifications
Physical:
Material: Steel
Material Thickness*: 0.0433 to 0.0480-in
Color: Black
Finish: Powder coated paint
Electrical:
Voltage Rating: 265v
Current Rating: 20 amp
Receptacle Type: NEMA 7-20
 * including paint.

Unit Dimensions	
Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs
Shipping Dimensions	
Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

Units: Inch(mm)

NOTES:

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB6101 PTAC Non-Electrical Subbase

Job Name Location Date

Purchaser Engineer

Submitted To For Reference Approval Construction

Schedule No.

GENERAL FEATURES

- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Field installed receptacle, disconnect switch and fuse kits available.



Specifications

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Black
 Finish: Powder coated paint

* including paint.


Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	1.5-in
Weight	4.0-lbs


Shipping Dimensions

Length	43.0-in
Height	5.5-in
Depth	2.0-in
Weight	4.5-lbs
Pallet Qty	160 pcs

Units: Inch(mm)

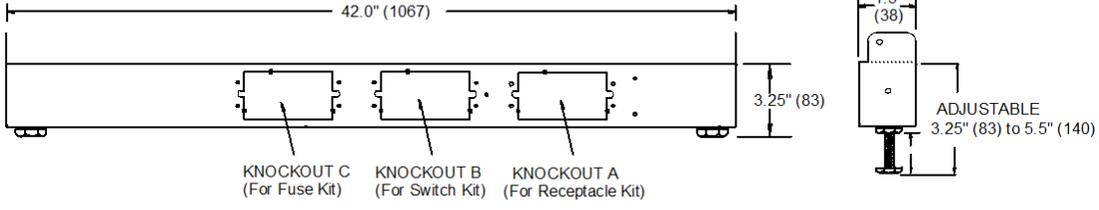

- NOTES:**
- Accessory subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
 - For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room when adding one of the electrical kits.
 - Wall sleeve must be installed 3-1/4 in. minimum and 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

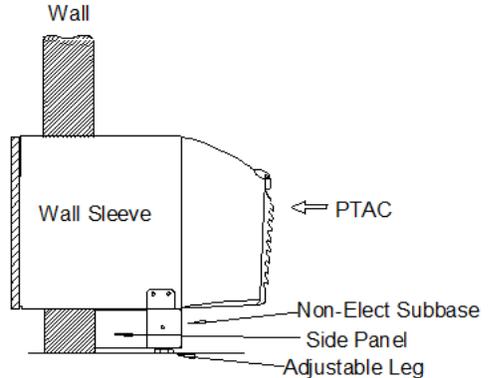

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYDSW120B

PTAC Subbase Switch 208/230v 20A Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. AYSB6101



Specifications

Physical:

Color: Black
Finish: Powder coated paint

Electrical:




Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

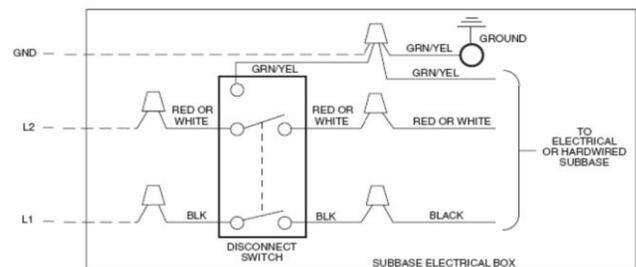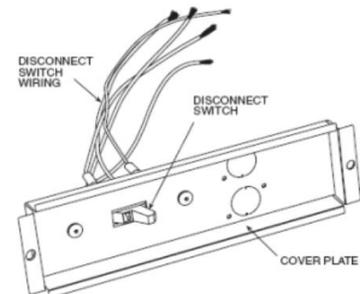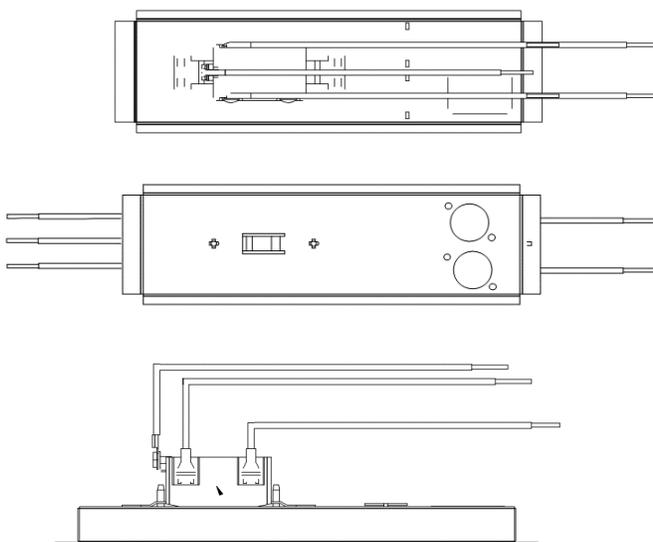

LEGEND
 - - - Field-Supplied (Power Supply) Wire
 ——— Factory-Supplied Wire
 △ Wire Connector (By Others)
 ○ Component Connection (Unmarked)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYDSW130B

PTAC Subbase Switch 208/230v 30A Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. AYSB6101



Specifications

Physical:

Color: Black
Finish: Powder coated paint

Electrical:




Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

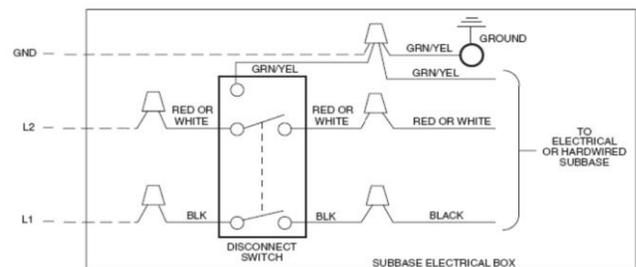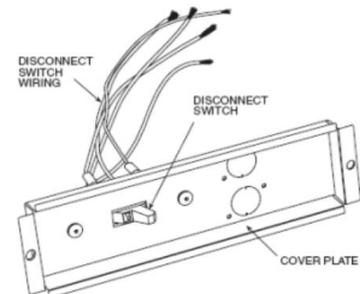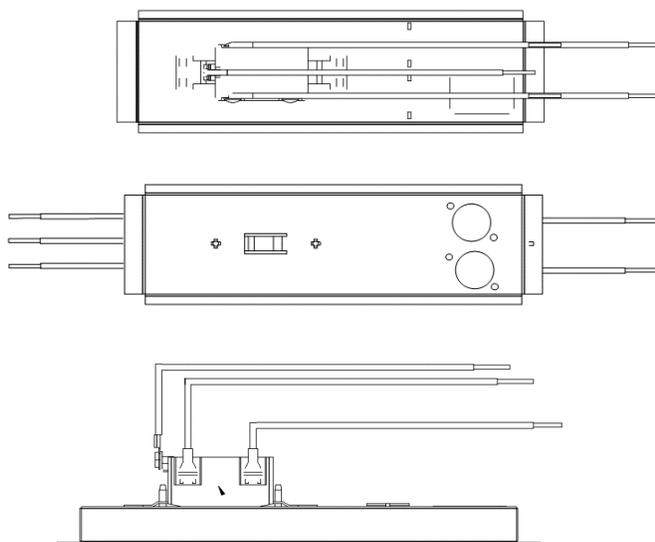

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYDSW220B PTAC Subbase Switch 265v 20A Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. AYSB6101



Specifications

Physical:
 Color: Black
 Finish: Powder coated paint


Electrical:
 Voltage Rating: 208/230/265v
 Current Rating: 30 amp
 Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

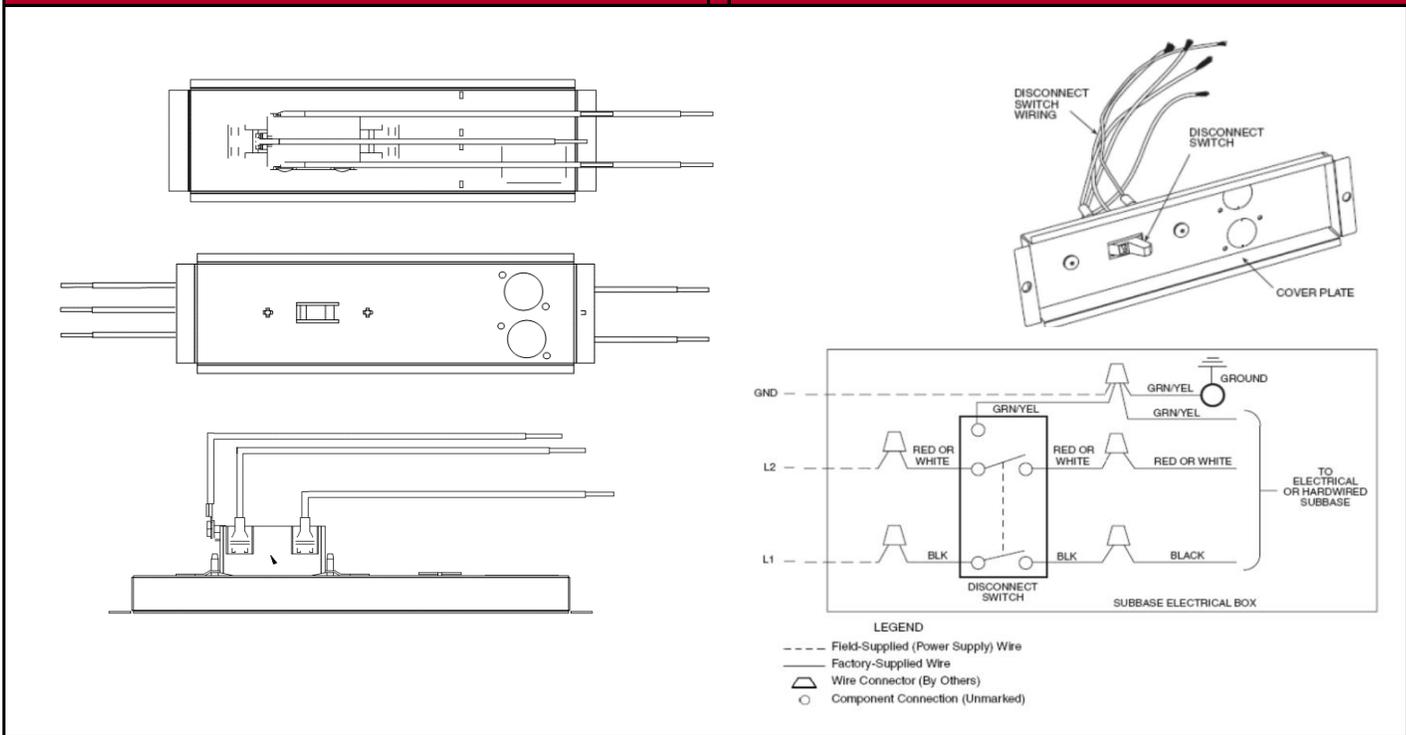

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYLL101B PTAC Leveling Legs

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		


GENERAL FEATURES

- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Two (2) legs per pack.




Specifications
Material: Steel Material Thickness*: 0.0433 to 0.0480-in Color: Black Finish: Powder coated paint * including paint.

Unit Dimensions	
Length	3.25-in
Height	1.5-in
Depth	1.5-in
Weight	1.0-lbs
Shipping Dimensions	
Length	5.0-in
Height	2.0-in
Depth	3.25-in
Weight	1.0-lbs
Pallet Qty	2920 pcs

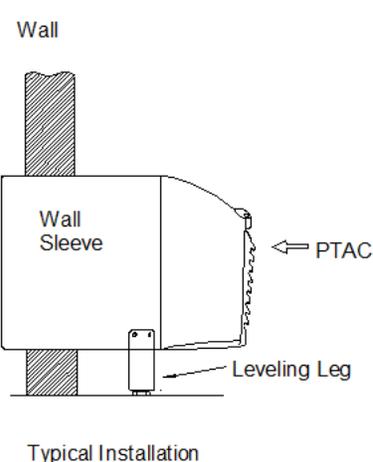

Typical Installation

Units: Inch(mm)

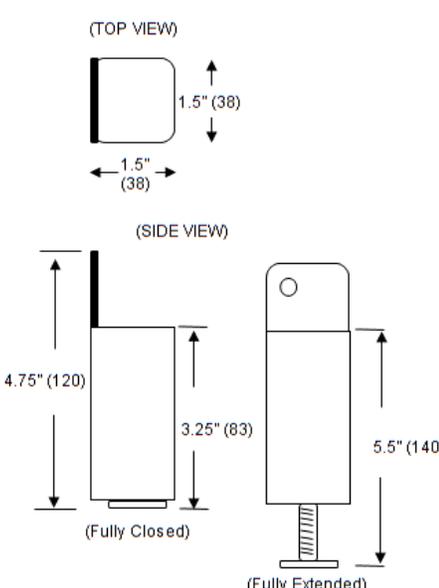

NOTES:

- 1) Accessory Leveling Legs are required for applications where wall sleeve extends 4 or more inches into the room or wall thickness is less than 2 inches.
- 2) For proper fit, wall sleeve must be installed 3-1/4 inches (minimum)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYLD1A Lateral Duct

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- One unit to heat or cool two separate rooms.
- Easily mounts to front of standard wall sleeve.
- Lined with acoustical & thermal insulation.
- 46-inch extension duct.
- Adjustable room duct register.
- Extension Duct may be directed to left or right side of the unit.



Specifications

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured


* including paint.

Dimensions

	Plenum w/out Transition	Extension Duct
Length	44.0-in	46-in
Height	3.5-in	3.5-in
Depth	7.0-in	7.0-in
Weight	11-lbs	12-lbs

Shipping Dimensions

Length	47.5-in
Height	8.0-in
Depth	11.5-in
Weight	30.0-lbs
Pallet Qty	15 pcs

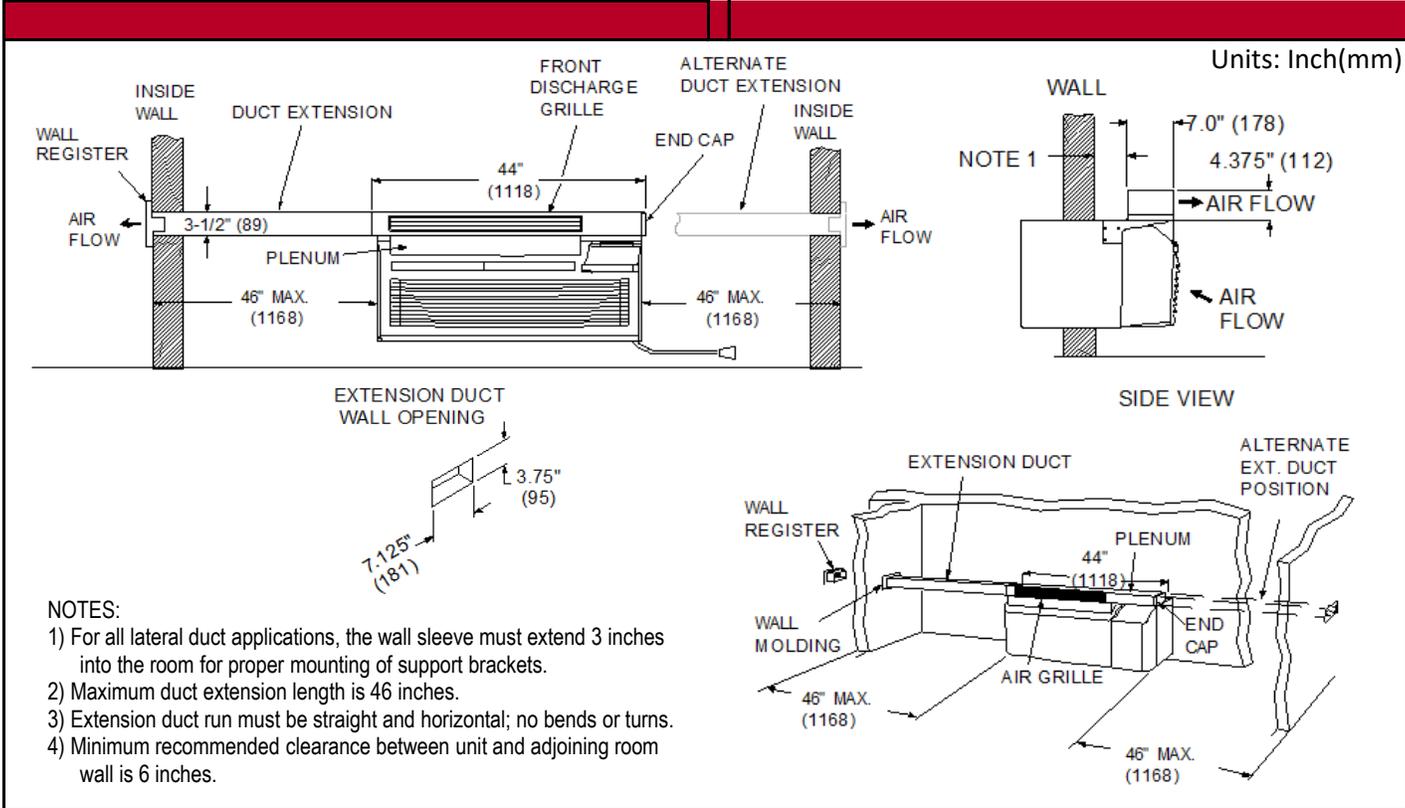

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.



For more information visit www.lgptac.com

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.